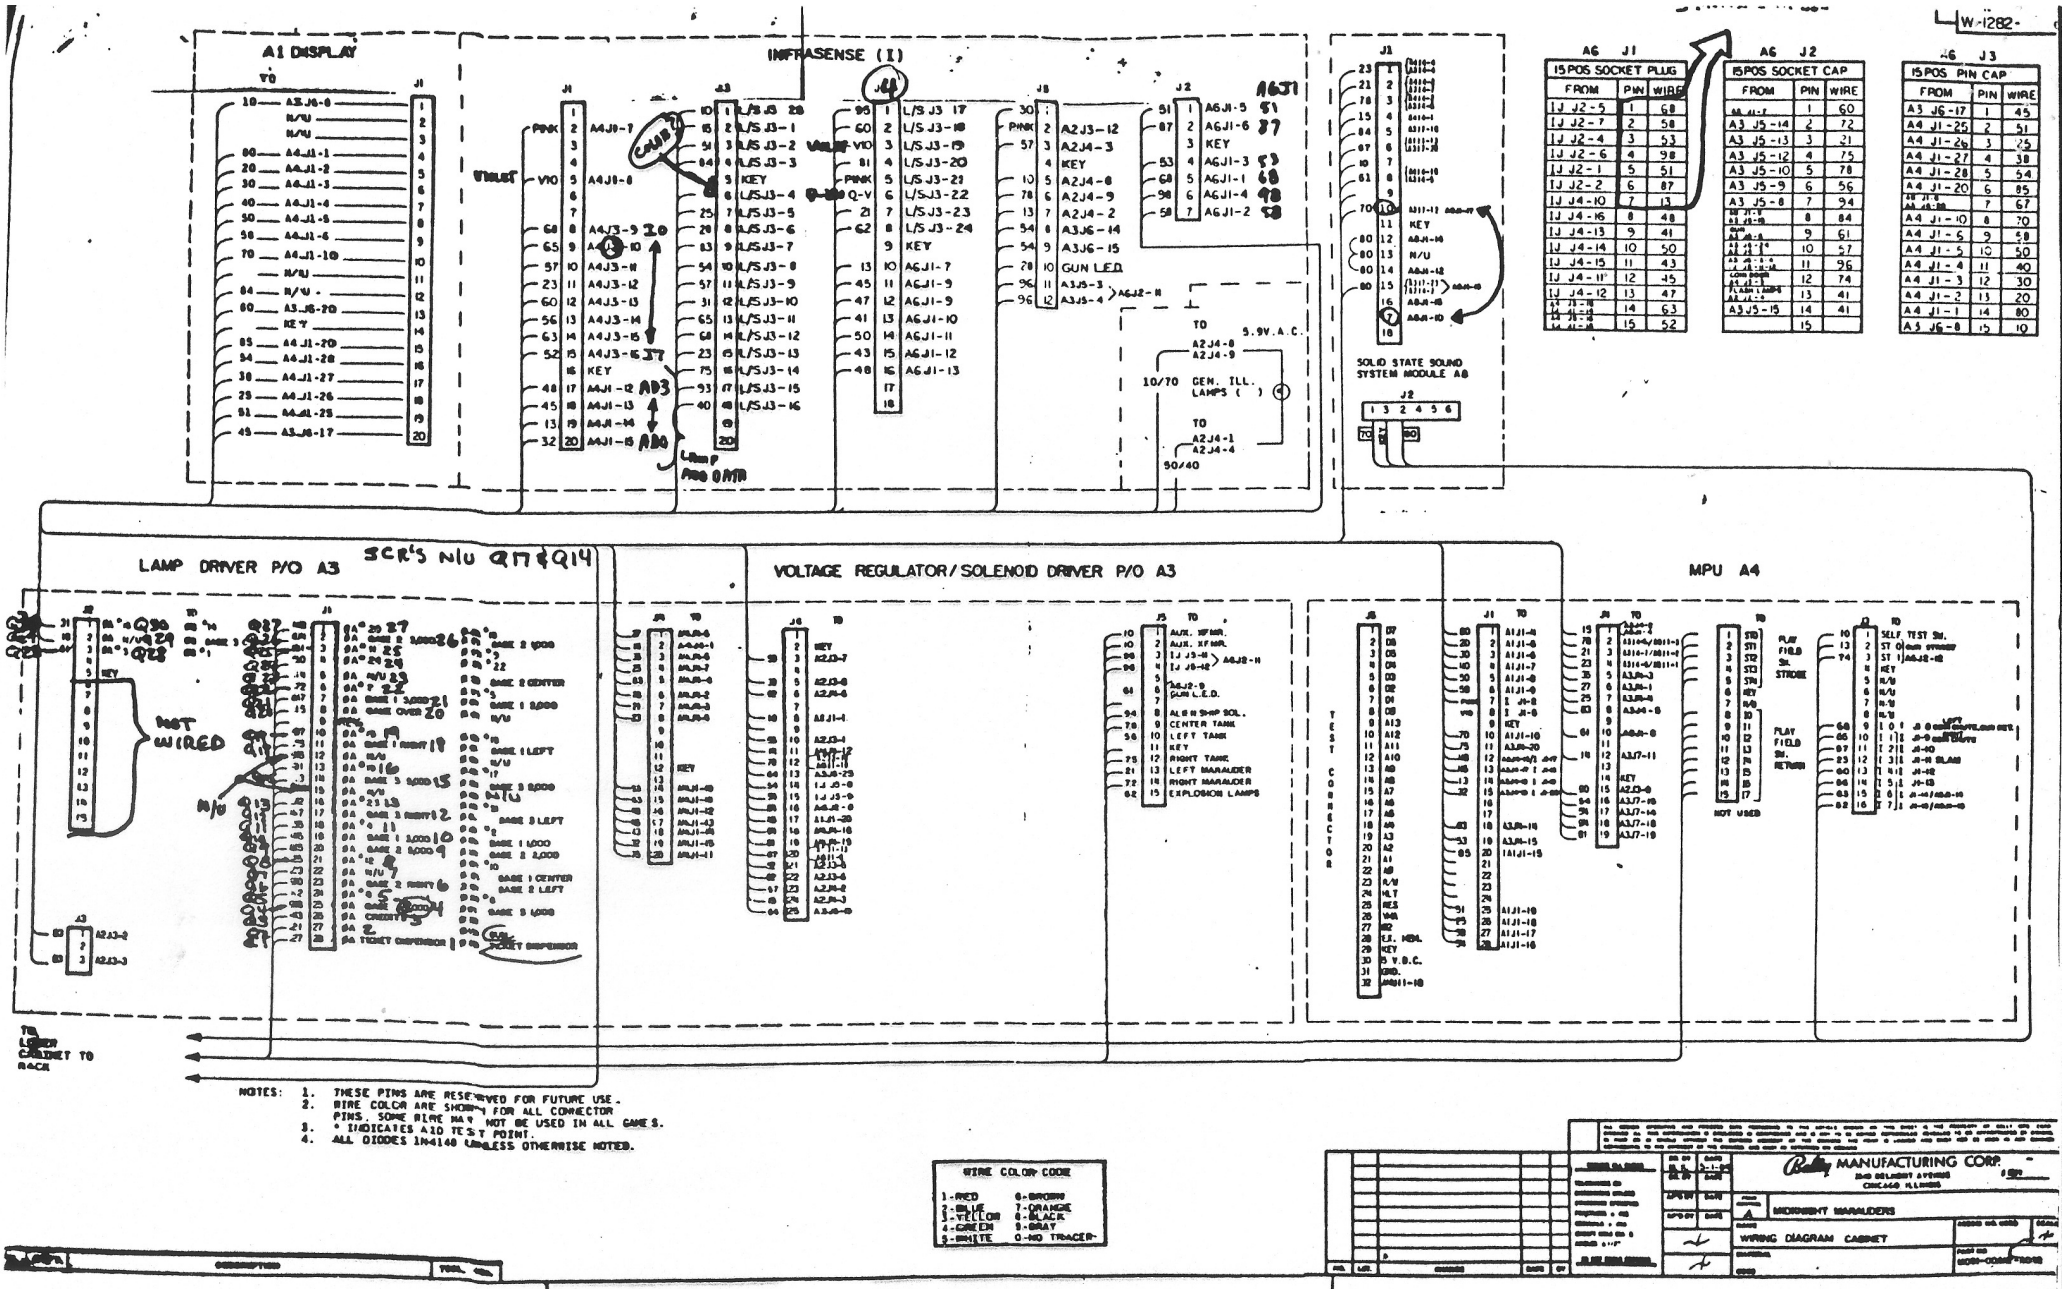
W-1282-
A1 DISPLAY
INFRASENSE (I)
SOLID STATE SOUND SYSTEM MODULE A8
A6 J1
15 POS SOCKET PLUG
FROM | PIN | WIRE
1J J2-5 | 1 | 60
1J J2-7 | 2 | 58
1J J2-4 | 3 | 53
1J J2-6 | 4 | 98
1J J2-1 | 5 | 51
1J J2-2 | 6 | 87
1J J4-10 | 7 | 13
1J J4-16 | 8 | 48
1J J4-13 | 9 | 41
1J J4-14 | 10 | 50
1J J4-15 | 11 | 43
1J J4-11 | 12 | 45
1J J4-12 | 13 | 47
14 | 14 | 63
15 | 15 | 52
A6 J2
15 POS SOCKET CAP
FROM | PIN | WIRE
A3 J6-14 | 2 | 72
A3 J5-13 | 3 | 21
A3 J5-12 | 4 | 75
A3 J5-10 | 5 | 78
A3 J5-9 | 6 | 56
A3 J5-8 | 7 | 94
8 | 84
9 | 61
10 | 57
11 | 96
12 | 74
13 | 41
A3 J5-15 | 14 | 41
15 |
A6 J3
15 POS PIN CAP
FROM | PIN | WIRE
A3 J6-17 | 1 | 45
A4 J1-25 | 2 | 51
A4 J1-26 | 3 | 25
A4 J1-27 | 4 | 38
A4 J1-28 | 5 | 54
A4 J1-20 | 6 | 85
7 | 67
A4 J1-10 | 8 | 70
A4 J1-5 | 9 | 58
A4 J1-5 | 10 | 50
A4 J1-4 | 11 | 40
A4 J1-3 | 12 | 30
A4 J1-2 | 13 | 20
A4 J1-1 | 14 | 80
A3 J6-8 | 15 | 10
LAMP DRIVER P/O A3
SCR'S N1U Q17&Q14
VOLTAGE REGULATOR/SOLENOID DRIVER P/O A3
MPU A4
NOT WIRED
TO LOWER CABINET TO RACK
NOTES:
1. THESE PINS ARE RESERVED FOR FUTURE USE.
2. WIRE COLOR ARE SHOWN FOR ALL CONNECTOR PINS. SOME WIRE MAY NOT BE USED IN ALL GAMES.
3. * INDICATES A10 TEST POINT.
4. ALL DIODES 1N4148 UNLESS OTHERWISE NOTED.
WIRE COLOR CODE
1-RED
2-BLUE
3-YELLOW
4-GREEN
5-WHITE
6-BROWN
7-ORANGE
8-BLACK
9-GRAY
0-NO TRACER
Bally MANUFACTURING CORP.
MIDWAY MARAUDERS
WIRING DIAGRAM CABINET