
ADJUSTMENTS ON GAME PC BOARD (ASUKA & ASUKA G25 00503A)



☆ THE CONTROL OF THIS GAME USES
ONE 8-WAY JOYSTICK AND 2 BUTTONS.
(PAIR CONTROL PANEL)

CONNECTOR

SOLDER SIDE		COMPONENTS SIDE				
GND	A	1	GND			
GND	В	2	GND			
+5V	C	3	+5V			
+5V	D	4	+5V			
-5V	E	5	-5V			
+12V	F	6	+12V (+13V)			
POST	H	7	POST			
COIN COUNTER B	J	8	COIN COUNTER A			
COIN LOCKOUT B	K	9	COIN LOCKOUT A			
SPEAKER (-)	L.	10	SPEAKER (+)			
	M	11				
VIDEO G	N	12	VIDEO R			
VIDEO SYNC	P	13	VIDEO B			
SERVICE SW	R	14	VIDEO GND			
TILT SW	S	15				
(COIN B)	T	16	COIN A			
2P START	U	17	1P START			
2P UP	٧	18	IP UP			
2P DOWN	W	19	IP DOWN			
2P LEFT	X	20	1P LEFT			
2P RIGHT	Υ	21	1P RIGHT			
2P SHOT BUTTON	Z	22	IP SHOT BUTTON			
2P BOMBER BUTTON	а	23	1P BOMBER BUTTON			
	b	24				
	С	25				
	d	26	the same of the sa			
GND	е	27	GND			
GND	f	28	GND			

NOTE) BEFORE CHANGING THE SETTINGS OF THE DIP SWITCH, TURN THE POWER SWITCH OFF.

SETTING OF DIP SWITCH A

(*) : FACTORY SETTING

SETTING	POSITION		1	2	3	4	5	6	7	8
SCREEN INVERSION	* · NORMAL	· NORMAL		OFF				SER13		70
	INVERS	ION		ON		120			241	
TEST MODE	* NORMAL	GAME			OFF				Take 1	
	TEST W	ODE		4	ON			A		M.
ATTRACT SOUND	* PRODUC	ED	OFF ·			OFF				
	NO PRODUC	ED				ON				
PLAY PRICING - COIN A	* 1 COIN	1 PLAY					OFF	000		
	1 COIN	2 PLAYS					ON	OFF	4 13	
	2 COINS	1 PLAY					OFF	ON	W.	
	2 COINS	3 PLAYS		A STATE OF THE PARTY OF THE PAR			ON	ON	100	
PLAY PRICING . COIN B	* 1 COIN	1 PLAY		Pay In	deg:	271			OFF	0.
	1 COIN	2 PLAYS							ON	OF
	2 COINS	1 PLAY		132	1				OFF	ON
	2 COINS	3 PLAYS	1	11/12					ON	ON

SETTING OF DIP SWITCH B

SETTING	POSITION	1	2	3	4	5	6	7	8
GAME DIFFICULTY EASY (A) →	A Property	OFF OFF					Ulas v		Tal.
	* - B					0000			
	C	OFF	OFF ON					1134	
DIFFICULT (D)	D	ON	ON						
	* 500 PTS.			OFF	OFF			Tolland.	
WARP BONUS POINTS	1500 PTS.			ON		No.		114	
	2000 PTS.			OFF	ON			100	
	2500 PTS.			ON	ON			100	
	* 3	30				OFF	OFF	William I	
	2					ON	OFF		
	1					OFF	ON		
	Att Alexander			1.0	adat n	ON	J.		
CONTINUED PLAY	1R · 2R ONLY							OFF	OFF
	* 1R · 2R · 3R ONLY							ON	JI
	WITH							OFF	ON
	WITHOUT							ON	O IV

ASKA & ASKA ROM 交換説明


(HOW TO EXCHANGE ROM OF ASUKA & ASUKA)


We will send revised(hitting ability etc)ROM, please exchange them.

(EXCHANGING PART)

Please exchange ROM installed on main P.C.Boards.



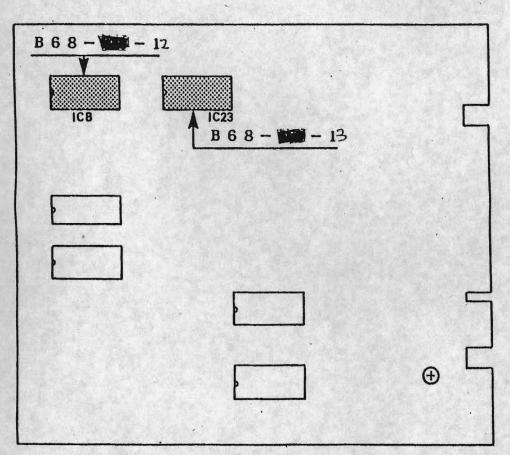



As shown by a drawing, separate them by inserting minus screwdriver alternately not to damage pins.

Pay careful attention to damage of pins and opposite setting.



ABUKA & ABUKA...

IN 2-PLAYER GAME, CONTINUE PLAY CAN BE PLAYED.



SHOT

BOMBER





POWER-INCREASING ITEMS



SHOT



LASER



BEAM



POWER UP (4 STEPS)



ONE BOMBER IS ADDED.
(MAX. 5)





ABUKA & ABUKA...

IN 2-PLAYER GAME, CONTINUE PLAY CAN BE PLAYED.



SHOT







POWER-INCREASING ITEMS



SHOT



LASER



BEAM



POWER UP (4 STEPS)



ONE BOMBER IS ADDED.
(MAX. 5)



G35 00375A

G35 00375A